

Geographic Information System

Zonal Statistics & Map Layout

Dr. Chan, Chun-Hsiang

Department of Geography National Taiwan Normal University JANAN N

06E

239

Taiman Region


Outline

- Mosaic To New Raster
- Contour
- Hillshade
- Slope
- Viewshed
- Zonal Statistics
- Map Layout




Mosaic To New Raster

- Merges multiple existing raster datasets or mosaic datasets into an existing raster dataset.
- You must set the pixel type to match your existing input raster datasets, e.g., 8-bit unsigned and 8-bit signed.

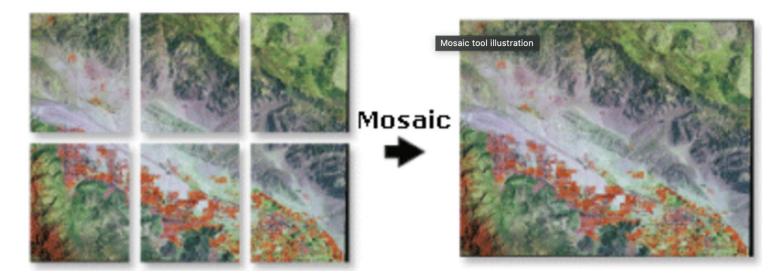

Contour


- Creates a feature class of contours from a raster surface.
- Contours are lines that connect locations of equal value in a raster dataset that represents continuous phenomena such as elevation, temperature, precipitation, pollution, or atmospheric pressure.

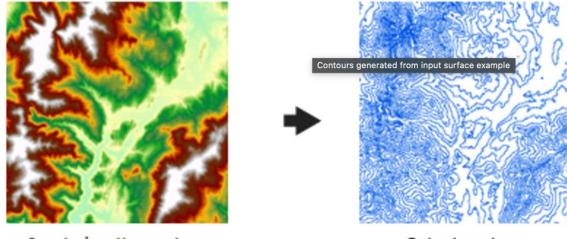

Output contours


Hillshade

• The Hillshade function produces a grayscale 3D representation of the terrain surface, with the sun's relative position taken into account for shading the image. Hillshading is a technique for visualizing terrain determined by a light source and the slope and aspect of the elevation surface.

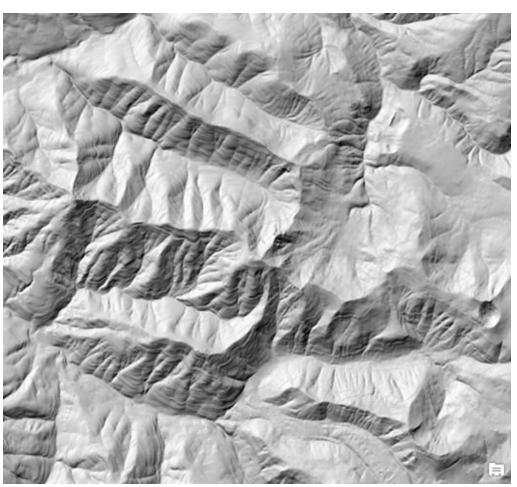

Slope

- Identifies the slope (gradient or steepness) from each cell of a raster. The Surface Parameters tool provides a newer implementation and enhanced functionality.
- The Slope tool identifies the steepness at each cell of a raster surface. The lower the slope value, the flatter the terrain; the higher the slope value, the steeper the terrain.

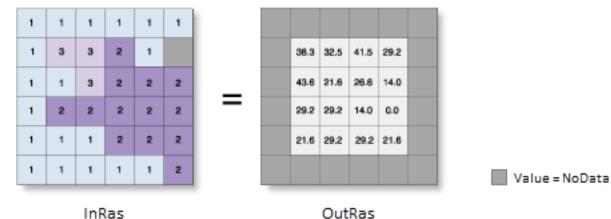


Viewshed

• Determines the raster surface locations visible to a set of observer features. The Geodesic Viewshed tool provides enhanced functionality or performance.


Input surface raster and observer features

Output raster

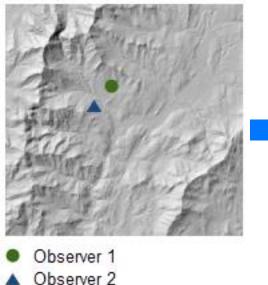




Visible

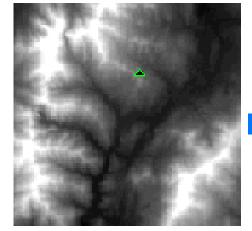

Input surface with observer point

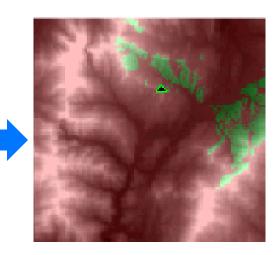


Output viewshed

2024/12/06

Chun-Hsiang Chan (2024) | Geographic Information System


Zonal Statistics

- Summarizes the values of a raster within the zones of another dataset. A zonal statistics operation is one that calculates statistics on cell values of a raster (a value raster) within the zones defined by another dataset.
- Example, ... Min(x)

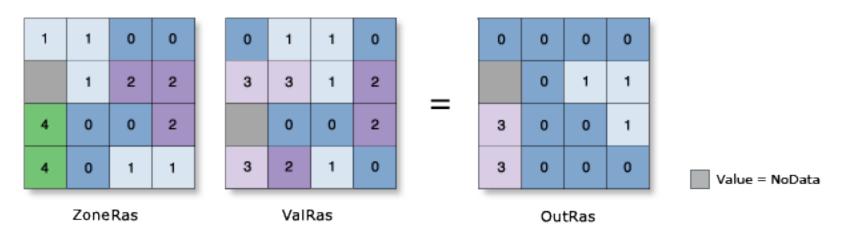

Map Layout

- As a map, you need to show lots of essential information to explain your map, such as ...
 - 1) Title of Map
 - 2) North Arrow
 - 3) Legend
 - 4) Scale Bar
 - 5) Chart (optional)
 - 6) Map (optional)

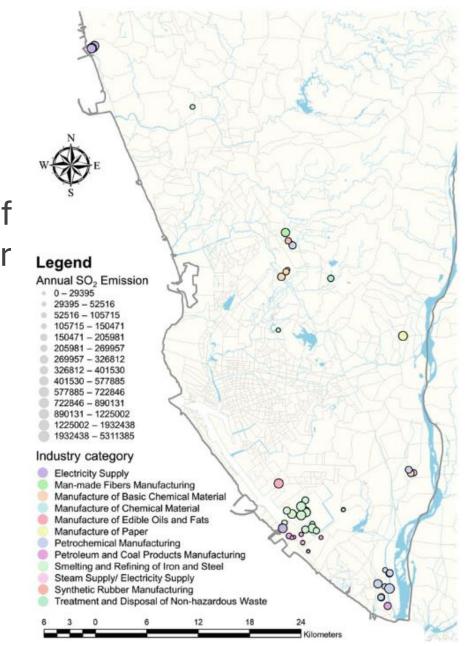

The Enc

Thank you for your attention!

Email: chchan@ntnu.edu.tw Web: toodou.github.io